



Bark Collar

Product Manual

Model TC316G






Please Read This Manual
Carefully Before Use

CUSTOMER SUPPORT:

 support@elecane.com

 www.elecane.com


COMPONENTS

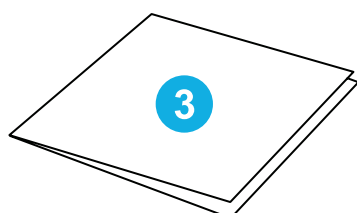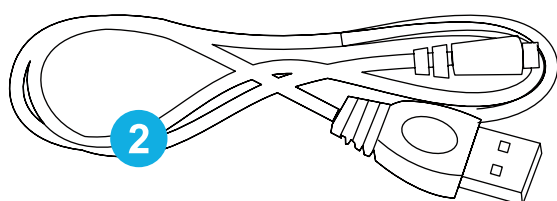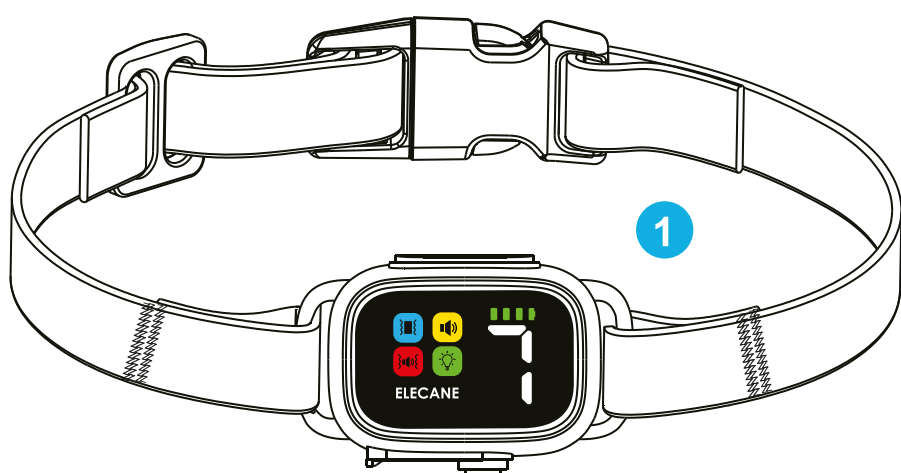

- 1 Bark Collar with Belt
- 2 Type-C Charging Cable
- 3 User Manual




PRODUCT OVERVIEW

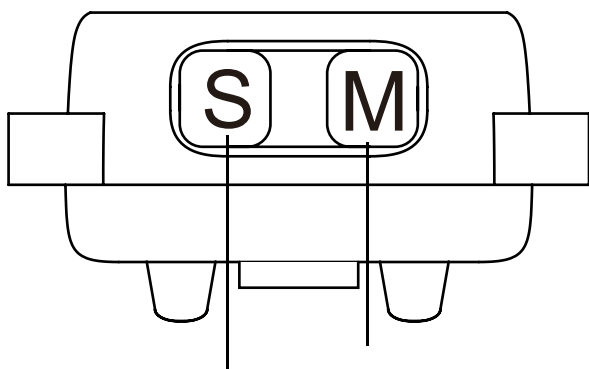

Sensitivity button

ON/OFF button (long press)
Mode button(short press)

Test the collar by blowing into the hole

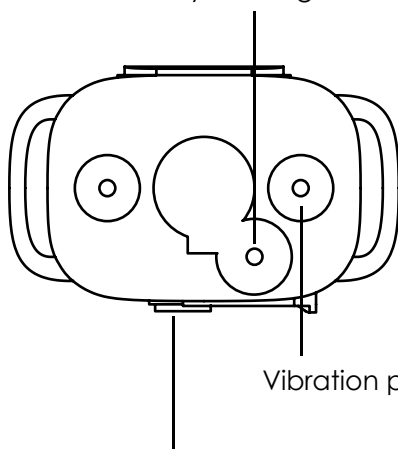

Vibration probes

Type-C charging port



Beep



Vibration



Beep + Vibration



Standby indicator light



Battery charge level display



Sensitivity display



PRODUCT INTRODUCTION

Our bark collar is designed to gently and effectively prevent excessive barking in your dog. Using humane methods, it applies a beep, vibration, or a combination of both to modify behavior without any shocks.

This advanced model features dual sensors with a built-in microphone and motion detector. This means the collar activates only when it detects both the sound of barking and the vibration of your dog's vocal cords, reducing false triggers and ensuring a more accurate response.

MAIN FEATURES

- **Modes:** Beep, vibration, or beep+vibration for tailored training.
- **Vibration Levels:** Gentle (1) to strong (7) for customized comfort.
- **Sensitivity Levels:** Low (1) for louder barks to high (7) for quieter dogs.
- **Durability:** Rechargeable, waterproof, perfect for any weather.
- **Ease of Use:** Simple 2-button operation for stress - free adjustments.
- **Display:** Clear LED screen for easy monitoring of settings and battery.



CHARGING INSTRUCTIONS

The device has a built-in 260 mAh rechargeable battery. Please charge the collar before use or when a low battery warning is displayed.

1. Use only the specified charger with a rating of 5 V and current between 500 - 1000 mA to charge the collar.
2. When charging, the battery bars are running circularly. When fully charged, the screen displays the icon (). A full charge takes about 2 hours.

Low battery indicator:

The device will power off automatically after the icon () flashes for 30 seconds.

OPERATION INSTRUCTIONS

1. Power On/Off:

Press the “M” button for 2 seconds, the screen lights up and a beep sound is heard, indicating the collar is powered on. Then press the “M” button for 2 seconds again to turn the bark collar off.

2. Mode Adjustment:


On turn-on state, short press the “M” button to choose working mode:

- () means it's under beep mode.
- () means it's under vibration mode.
- () means it's under beep+vibration mode.



3. Sensitivity Level Adjustment:

Press the “S” button to adjust 0-7 sensitivity levels. The highest level is 7. Please set suitable sensitivity level based on your dog’s barking. If the barking is loud, could decrease the sensitivity level. If the barking is loud, you could decrease the sensitivity level. If the barking is soft, you could increase the sensitivity level.

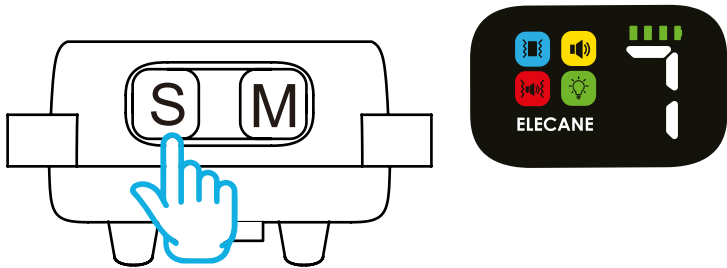

Higher sensitivity for softer barks, lower for louder ones

NOTE: The device has built-in microphone and motion sensors, and adds a test mode function. Adjust the sensitivity to level 0, meaning the device is set at Test Mode. For how to test, please refer to the test instructions below. At sensitivity levels 1-6, the device only activates when it detects both barking sound and vocal cord vibration to avoid false triggers. At sensitivity level 7, it is triggered when it detects a dog barking.

Sensitivity Level	Work status
0	The device enters Test Mode
1-6	The device only activates when it detects both dog barking and neck movement simultaneously
7	The device is triggered when it detects a dog barking without motion detection

If there is no operation or dog barking within 30 seconds, the screen will turn off and enter standby mode, with the standby indicator light flashing every 5 seconds. Pressing “M” or “S” button or a dog bark will reactivate it. After turning on again, the device automatically returns to the previous working mode and sensitivity level.




TEST THE ANTI BARK COLLAR

You can use the Test Mode to verify the device's effectiveness.

1. Press the "S" button to adjust the sensitivity to level 0, then blow into or shout towards the microphone hole on the back of the collar.



2. When the bark collar is triggered, it will for 1 second, then vibrate for 1 second, the mode icon (🔊 → 🔊) will flash meanwhile, indicating the functions well.

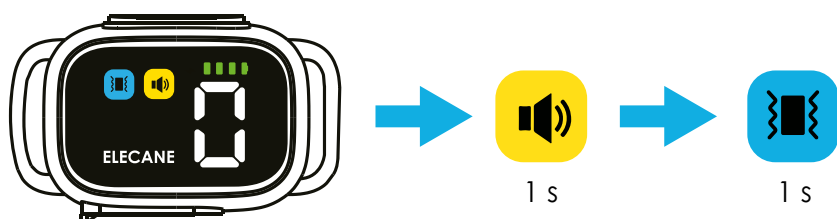

NOTE: After completing the test or if there is no operation within 10 seconds, the device will automatically return to the previous mode and switch to sensitivity level 7.

HOW THIS BARK COLLAR WORKS

There are 7 progressive correction levels in a cycle under each anti-barking mode, as shown below.

The working sequence under beep mode:

1 st: 0.8 s beep, the icon () flashes for 0.8 s

2 nd: 1.6 s beep, the icon () flashes for 1.6 s

3 rd: 2.4 s beep, the icon () flashes for 2.4 s

4 th: 3.2 s beep, the icon () flashes for 3.2 s

5 th: 4.0 s beep, the icon () flashes for 4.0 s

6 th: 4.0 s beep, the icon () flashes for 4.0 s

7 th: 4.0 s beep, the icon () flashes for 4.0 s

8 th : 75 s sleep mode; If the interval time for each bark over 30 s, it auto-returns to the first trigger sequence.

The working sequence under vibration mode:

1 st: 0.8 s vibration, the icon () flashes for 0.8 s

2 nd: 1.6 s vibration, the icon () flashes for 1.6 s

3 rd: 2.4 s vibration, the icon () flashes for 2.4 s

4 th: 3.2 s vibration, the icon () flashes for 3.2 s

5 th: 4.0 s vibration, the icon () flashes for 4.0 s

6 th: 4.0 s vibration, the icon () flashes for 4.0 s

7 th: 4.0 s vibration, the icon () flashes for 4.0 s

8 th: 75 s sleep mode; If the interval time for each bark over 30 s, it auto-returns to the first trigger sequence.



The working sequence under beep+vibration mode:

1 st: 0.8 s beep + vibration, the icon () flashes for 0.8 s

2 nd: 1.6 s beep + vibration, the icon () flashes for 1.6 s

3 rd: 2.4 s beep + vibration, the icon () flashes for 2.4 s

4 th: 3.2 s beep + vibration, the icon () flashes for 3.2 s

5 th: 4.0 s beep + vibration, the icon () flashes for 4.0 s

6 th: 4.0 s beep + vibration, the icon () flashes for 4.0 s


7 th: 4.0 s beep + vibration, the icon () flashes for 4.0 s

8 th: 75 s sleep mode; If the interval time for each bark over 30 s, it auto-returns to the first trigger sequence.


FITTING THE COLLAR TO YOUR DOG

PLEASE ENSURE THAT THE COLLAR IS FITTED CORRECTLY.

1. Center the Probes under your dog's neck (Image A).

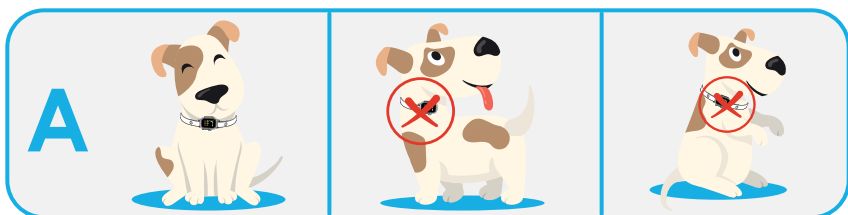


2. The collar should be positioned snugly around your dog's neck.

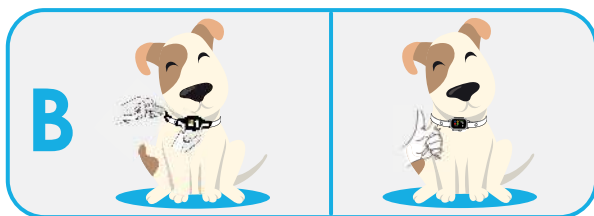


HOW TO ADJUST THE BELT

1. If the belt is too long, you can cut off extra parts.

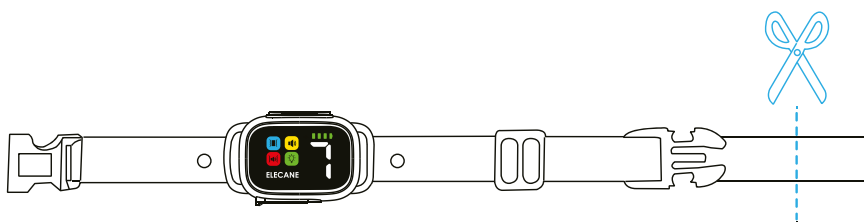

2. Push and pull the belt or slide the adjuster to adjust the collar length.

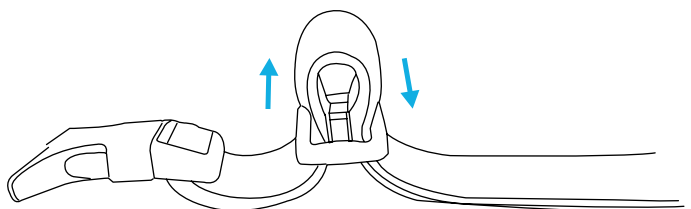

Tips for Training Your Dog with the Anti Bark Collar



Please don't leave your dog unattended when you first start training with the collar.



You should train your dog with commands (such as "NO!") when he or she barks. The collar will reinforce the command.



The collar should not be put on your dog for more than 12 hours per day.



Cautions!

- Do not allow your dog to chew the collar. Prevent your dog from scratching or clawing at that casing.
- This device is made of plastic and electronic components that are not digestible. Consult your vet immediately if your dog swallows any parts of this product.
- The collar is not intended for use as a restraining collar. If you are using a leash, use it with a separate restraining type of collar.
- The sensitivity level can be adjusted according to the dog's barking. If the barking is loud, you could decrease the sensitivity level. If the barking is soft, you could increase the sensitivity level. Set the suitable sensitivity level for your dog.
- Regularly observe your dog's reactions while wearing the collar. If there are any negative reactions, discontinue use immediately and seek advice from professionals.

FAQs

Q: The collar keeps going off or it's activated easily even when my dog shakes its head.

A1: The sensitivity level is too high. Reduce it by pressing the "S" button.

A2: The collar is not tight enough. Please tighten the collar.

Q: My dog barks, but the collar isn't activated

A1: The collar might be running out of battery, please charge it.

A2: You might need to increase the sensitivity level by pressing the "S" button.

A3: The collar might be too loose to fit your dog's neck. Please tighten it to ensure no more than one finger can pass through.

Q: Is the bark collar waterproof?

A1: It is weatherproof, such as for walking on rainy days, but you must seal the charging port tightly and keep it dry after getting wet.

Q: Can I charge this product with any type of charger?

A1: No, we recommend using a charging adapter rated at 5 V/500-1000 mA because using a charger rated at 9 V or 12 V may damage your device.





Unlock Exclusive Perks!

Scan the QR code for instant access to product guides, VIP support, special offers, and a FREE e-book.

Scan the QR Code or Visit:

<http://qr.elecan.com/G316>